

PRECISION SPINE
SURELOK™
PEDICLE SCREW SYSTEM

INNOVATIVE DESIGN


The SureLOK™ Pedicle Screw System, available in standard and cannulated configurations, is a top-loading, low profile, posterior spinal fixation system designed to provide stabilization as an adjunct to fusion. SureLOK™ is a comprehensive system which consists of pedicle screws, rods, cross-links and locking caps. The unique split saddle design enhances locking while the proximal tapered thread form delivers proven pull-out strength. All of the components are available in a variety of sizes to more closely match the patient's anatomy.



SURELOK™ PEDICLE SCREW



Unique Split Saddle Design envelops the screw head to enhance locking and decrease risk of cross threading and head splay

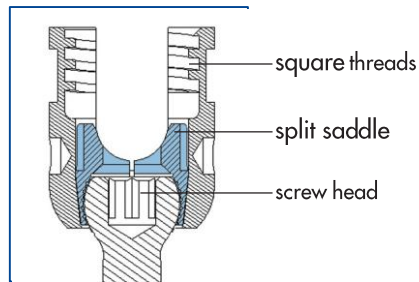

Proximal Tapered Thread Design increases bone/screw interface, enhancing pull-out strength


30° Screw Angulation provides intraoperative flexibility



Friction Fit Head facilitates rod placement and improves mechanical stability

MIS Cannulated Screw Implants and Instruments provide for MIS approaches with intuitive instruments using the SureLOK™ implant design features

Pull-Out Strength Analysis

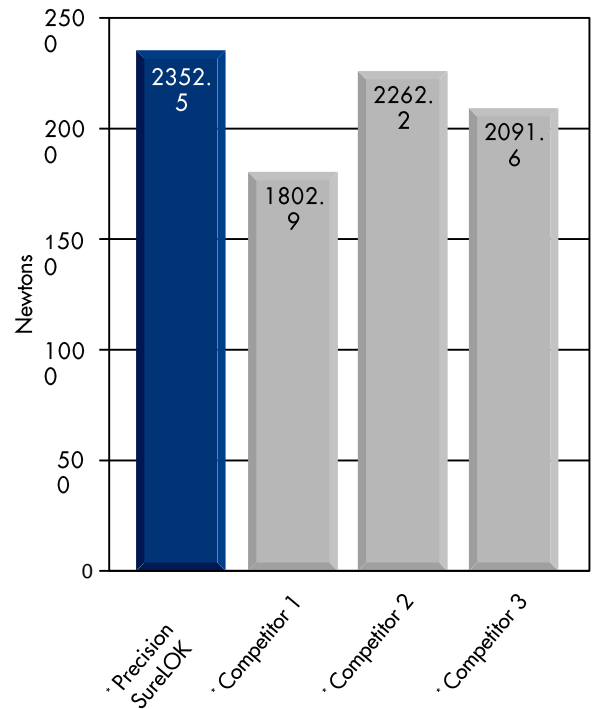

SURELOK™ IMPLANT SIZING

Screw Diameters – 4.5, 5.5, 6.5, 7.5 and 8.5mm

Screw Lengths – 25-55mm (5mm increments)

* Reduction and Iliac screws available

Rod Diameter – 5.5mm

Straight Rod Lengths – 40-120mm (20mm increments) 200, 250 and 400mm

Curved Rod Lengths – 35-80mm (5mm increments) 90, 100, 110 and 120mm

Cross-Link Lengths – 35mm (35 - 37.5mm) 38mm (37.5 - 40mm), 42mm (40 - 45mm), 50mm (45 - 55mm) and 60mm (55 - 75mm)

Precision Spine, Inc.

2050 Executive Drive, Pearl, MS 39208

Customer Service: 1.888.241.4773

Phone: 601.420.4244

Toll Free: 877.780.4370

Fax: 601.420.5501

www.precisionspineinc.com



CE 2797